

10-04-00
PATENT APPLICATION TRANSMITTAL LETTER

Assistant Commissioner for Patents
Box Patent Applications
Washington, D.C. 20231

Certificate of Mailing by "Express Mail"
"Express Mail" Mailing Label No. EL604133600US

Date of Deposit October 3, 2000

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail" in an envelope addressed to:
Commissioner of Patents and Trademarks,
Washington, D.C. 20231 on October 3, 2000
(Date of Deposit)

Shawn D. Bauer

Name of person mailing Document or Fee

Shawn D. Bauer

Signature

October 3, 2000

Date of Signature

Sir:

Transmitted herewith for filing is the patent application of: Mark B. Lester and Michael C. Jones
Attorney Docket No. 1671-0099

For: ACETABULAR CUP AND REAMER ASSEMBLY AND ASSOCIATED METHOD FOR
SECURING THE CUP TO AN ACETABULUM

Enclosed are also:

- * Patent Application (34 pages of text)
- * 6 sheets of Formal Drawings (2 sets)
- * Executed Declaration and Power of Attorney
- * Recordation Form Cover Sheet
- * Executed Assignment
- * Information Disclosure Statement
- * PTO Form 1449
- * 5 Cited References
- * Check in the amount of \$1,090.00 (\$1,050.00 for the Filing Fee and \$40.00 for the Recordation of Assignment Fee)
- * One return postcard

Applicant(s): Lester et al.
Attorney Docket No. 1671-0099
Express Mail No. EL604133600US

Please address correspondence to:

Paul J. Maginot
Maginot, Addison & Moore
Bank One Center/Tower
111 Monument Circle, Suite 3000
Indianapolis, Indiana 46204-5130

CLAIMS AS FILED

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$710.00
Total Claims	30-20	10	\$ 18	\$180.00
Independent Claims	5-3	2	\$ 80	\$160.00
Multiple Dependent Claims	any		\$270	\$0.00
Total Filing Fee				\$1,050.00

* Please charge any deficiency or credit any overpayment to Deposit Account No. 13-0014, but not to include any payment of issue fees.


Respectfully Submitted,



Shawn D. Bauer

Registration No. 41,603

October 3, 2000

CERTIFICATE OF MAILING BY "EXPRESS MAIL"
"Express Mail" Mailing Label Number <u>EL604133600US</u>
Date of Deposit <u>October 3, 2000</u>
I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" Service under 37 C.F.R. §1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D C. 20231.
<u>Shawn D. Bauer, Registration No. 41, 603</u>
(Typed or Printed Name of Person Mailing Paper or Fee)

(Signature of Person Mailing Paper or Fee)

**ACETABULAR CUP AND REAMER ASSEMBLY AND ASSOCIATED
METHOD FOR SECURING THE CUP TO AN ACETABULUM**

Technical Field of the Invention

5 The present invention relates generally to an acetabular component, and more particularly to an acetabular cup and reamer assembly and associated method for securing the cup to an acetabulum.

Background of the Invention

10 During the lifetime of a patient, it may be necessary to perform a hip replacement procedure on the patient as a result of, for example, disease or trauma. The hip replacement procedure may involve a total hip replacement or a partial hip replacement. In a total hip replacement procedure, a femoral component having a head portion is utilized to
15 replace the natural head portion of the thigh bone or femur. The femoral component typically has an elongated intramedullary stem which is utilized to secure the femoral component to the patient's femur. In such a

total hip replacement procedure, the natural bearing surface of the acetabulum is resurfaced or otherwise replaced with a cup-shaped acetabular component which provides a bearing surface for the head portion of the femoral component.

5 Acetabular cups may be secured to the acetabulum in a number of different manners. For example, acetabular cups may be secured to the acetabulum by the use of bone cement. However, recent studies have speculated that it may be desirable to secure artificial components to natural bone structures without the use of bone cement. Hence, a
10 number of press fit acetabular cups have been designed for securement to the acetabulum without the use of bone cement.

 In either case (i.e. cemented or cementless), the acetabulum is first reamed by the surgeon in order to create a cavity into which the acetabular cup is secured by the use of a surgical tool known as a
15 reamer. It is often difficult for the surgeon to properly match the size of the reamer to the desired acetabular cup size.

 Although press fit acetabular cups have heretofore been referred to as being "generally hemispherical" in shape, such heretofore designed cups, in reality, are sub-hemispherical in shape. In particular, as shown in
20 the prior art drawing of FIG. 7, a heretofore designed acetabular cup 100 has an apex or dome 102 at a proximal end 104 thereof along with an annular rim 106 at a distal end 108 thereof. In between the dome 102

and the annular rim 106, the prior art acetabular cup 100 has a sidewall 108 which has a convex proximal surface and a concave distal surface.

However, as shown in FIG. 7, the configuration of the prior art acetabular cup 100 is sub-hemispherical. In particular, a "true"

5 hemisphere 114 is shown in FIG. 7 as a phantom line overlay. As can be seen, a distal face 116 of the annular rim 106 does not, in fact, lie along the 180° surface (or loosely, the equator 118) of the hemisphere 114, but rather is recessed away from the equator 118 by a relatively significant distance X. In fact, it is not uncommon for prior art cup designs to be
10 recessed from the equator 118 of the cup by as much as 4-5 millimeters (i.e. X=4-5 mm).

Such a configuration has a number of drawbacks associated therewith. For example, such a large recess distance X (i.e. 4-5 mm) renders it difficult for the surgeon to ream a properly sized cavity in the
15 acetabulum. In particular, the cutting head of heretofore designed reamers are typically configured as relatively true hemispheres. Hence, when a surgeon reams the patient's acetabulum, the surgeon has to "estimate" the approximate depth of the reamed recess. More specifically, if the surgeon reams all the way to the 180° surface or "equator" of the
20 reamer, the annular rim 106 of the acetabular cup 100 will be recessed in the reamed cavity. Conversely, if the surgeon does not ream deeply enough (i.e. "under reams"), the acetabular cup 100 will not be fully seated in the reamed cavity of the acetabulum. In light of the fact that

surgeons occasionally select a reamer that is slightly smaller in size than the acetabular cup to be implanted, under reaming may also disadvantageously lead to bone fracture of the acetabulum since excessive force is often utilized to insert the cup into the undersized (i.e. under reamed) cavity. Some of the early bone cemented cups did not suffer from this problem by being configured more closely as "true" hemispheres. However, as indicated above, such cups undesirably required the use of bone cement during implantation thereof.

Another drawback associated with heretofore designed press fit acetabular cups relates to the configuration of the outer shell. In particular, in an attempt to increase retaining forces, a number of acetabular cups have been designed with a flared rim (known as dual radius or "bubble" cups) or a frusto-conically shaped annular rim portion (known as dual-geometry cups). Although the configuration of such cups may generate relatively strong retention forces at the rim portion of the cup, surface contact and therefore retention forces are relatively small at the portions of the outer shell other than the rim portion. Moreover, such reduced surface contact at the portions of the outer shell other than the rim portion reduces bone ingrowth in such portions.

What is needed therefore is an acetabular cup and reamer assembly and associated method which overcomes one or more of the above-mentioned drawbacks. What is particularly needed is an acetabular cup and reamer assembly and associated method which

allows for the cup to be secured to the acetabulum without the use of bone cement. What is also needed is an acetabular cup and reamer assembly and associated method which facilitates greater amounts of bone ingrowth relative to heretofore designed acetabular cups.

5

Summary of the Invention

In accordance with one embodiment of the present invention, there is provided a method of securing an acetabular cup to an acetabulum so as to provide a bearing surface for a head portion of a femur. The method includes the step of reaming a hemispherically-shaped cavity into the acetabulum with a reamer. The reamer includes a hemispherically-shaped cutting head. The method also includes the step of press fitting the acetabular cup into the cavity reamed into the acetabulum. The acetabular cup includes a cup body having a substantially constant radius sidewall which extends outwardly from an apex to an annular rim. The sidewall defines an imaginary hemisphere with an outer face of the annular rim defining a segmental plane which intersects the imaginary hemisphere. The segmental plane is parallel to a great circle of the imaginary hemisphere. The segmental plane is separated from the great circle of the imaginary hemisphere by a distance D in which $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

In accordance with another embodiment of the present invention, there is provided a prosthetic hip assembly for replacing a natural bearing

surface of an acetabulum with an artificial bearing surface adapted to cooperate with a head portion of a femur. The prosthetic hip assembly includes a hemispherically-shaped reamer adapted to ream a hemispherically-shaped cavity into the acetabulum. The reamer includes a hemispherically-shaped cutting head. The prosthetic hip assembly also includes an acetabular cup adapted to be press fit into the cavity reamed into the acetabulum. The acetabular cup includes a cup body having a substantially constant radius sidewall which extends outwardly from an apex to an annular rim. The sidewall defines an imaginary hemisphere with an outer face of the annular rim defining a segmental plane which intersects the imaginary hemisphere. The segmental plane is parallel to a great circle of the imaginary hemisphere. The segmental plane is separated from the great circle of the imaginary hemisphere by a distance D in which $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

In accordance with a further embodiment of the present invention, there is provided a method of securing an acetabular cup to an acetabulum. The acetabular cup having a bearing surface adapted to receive a head portion of a femur. The method includes the step of reaming a hemispherically-shaped cavity having a first radius into the acetabulum with a reamer. The reamer includes a hemispherically-shaped cutting head which possesses the first radius. The method also includes the step of press fitting the acetabular cup into the cavity reamed into the acetabulum. The acetabular cup includes a cup body having a

substantially constant radius sidewall which extends outwardly from an apex to an annular rim. The sidewall defines an imaginary hemisphere having a second radius. The second radius is greater than the first radius. An outer face of the annular rim of the cup body defines a segmental
5 plane which intersects the imaginary hemisphere. The segmental plane is parallel to a great circle of the imaginary hemisphere. The segmental plane is separated from the great circle of the imaginary hemisphere by a distance D in which $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

In accordance with another embodiment of the present invention,
10 there is provided a method of securing an acetabular cup to an acetabulum so as to provide a bearing surface for a head portion of a femur. The method includes the step of reaming a hemispherically-shaped cavity into the acetabulum with a reamer. The method also includes the step of press fitting the acetabular cup into the cavity reamed
15 into the acetabulum. The acetabular cup includes a cup body having an outer rim and a sidewall which defines an imaginary hemisphere having a great circle. All points located on the sidewall are separated from a center point of the great circle by a substantially equal distance R. All points located on a peripheral edge of the outer rim are separated from the great
20 circle of the imaginary hemisphere by a distance D in which $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

In accordance with yet a further embodiment of the present invention, there is provided a prosthetic hip assembly for replacing a

It is moreover an object of the present invention to provide a method and apparatus for securing an acetabular cup to an acetabulum which facilitates greater amounts of bone ingrowth relative to heretofore designed acetabular cups.

5 The above and other objects, features, and advantages of the present invention will become apparent from the following description and the attached drawings.

Brief Description of the Drawings

10 FIG. 1 is an exploded perspective view which shows an acetabular cup and associated bearing insert which incorporate the features of the present invention therein;

 FIG. 2 is an enlarged side elevational view of the acetabular cup of FIG. 1 with an imaginary true hemisphere superimposed thereon;

15 FIG. 3 is a perspective view of a reamer which is utilized to ream the acetabulum of a patient prior to implantation of the acetabular cup of FIG. 1;

 FIG. 4 is a perspective view of the acetabulum subsequent to reaming with the reamer of FIG. 3;

20 FIG. 5 is a view similar to FIG. 4, but showing the acetabular cup press fit into the cavity reamed into the acetabulum by the reamer;

FIG. 6 is a diagrammatic view which shows an outline of the acetabular cup of FIG. 1 superimposed on an outline of the cavity reamed into the acetabulum by the reamer; and

FIG. 7 is a side elevational view of a prior art acetabular cup.

5

Detailed Description of the Invention

While the invention is susceptible to various modifications and alternative forms, a specific embodiment thereof has been shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that there is no intent to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

Referring now to FIG. 1, there is shown a prosthetic hip assembly 10 for use in either a partial or total hip replacement procedure. The prosthetic hip assembly 10 includes an acetabular component or cup 12 and a bearing insert 14. Collectively, the acetabular cup 12 and the bearing insert 14 provide an artificial bearing surface on which a natural or artificial head portion of a femur (not shown) may bear. In particular, as shall be discussed in greater detail, the acetabular cup 12 is implanted into a patient's acetabulum 16 (see FIGS. 4 and 5) such that the bearing insert 14 may then be positioned in an insert-receiving cavity 18 (see FIG. 1) defined in the acetabular cup 12. The bearing insert 14 is preferably

constructed from a polymeric material such as polyethylene or ultra-high molecular weight polypropylene (UHMWPE) thereby providing a desirable artificial surface on which the head portion of the femur may bear.

As shown in FIG. 1, the bearing insert 14 has a number of keying tabs 20 defined therein. The keying tabs 20 are received into a number of corresponding keying slots 22 defined in the acetabular cup 12 to prevent rotation of the bearing insert 14 relative to the acetabular cup 12 when the bearing insert 14 is positioned in the insert-receiving cavity 18 of the cup 12.

As shown in FIGS. 1 and 2, the acetabular cup 12 includes a cup body 24 which has a sidewall 26. The sidewall 26 has a textured or porous outer surface. Such a textured or porous outer surface enhances bone ingrowth thereby facilitating long-term attachment of the acetabular cup 12 to the acetabulum 16. The sidewall 26 extends outwardly at a substantially constant radius R_C from an apex or dome 28 of the body 24 to an annular rim 30. In particular, as shown in FIG. 2, an imaginary hemisphere 32 may be superimposed over the acetabular cup 12. The imaginary hemisphere 32, as with any true hemisphere, possesses an apex 34 and a great circle 36. The great circle 36 is the circle that is defined by the intersection of the surface of a sphere by a plane that passes through the center of the sphere. In essence, a sphere which is bisected along its "equator" into two equal halves forms a great circle at the plane of bisection. Hence, the center point of the bisected sphere is

the center point of the great circle of the hemisphere. Accordingly, every point along the surface of the imaginary hemisphere 32 (and hence every point on the outer surface of the sidewall 26) lies an equal distance (i.e. the radius R_C) from a center point 38 of the great circle 36 of the

5 imaginary hemisphere 32. Indeed, substantially every point on the sidewall 26 of the cup body 24 is positioned a distance that is equal to the radius R_C away from the center point 38 of the great circle 36. It should be appreciated that the textured or porous outer surface of the sidewall 26 creates a somewhat irregular or “jagged” outer surface. Hence, as used
10 herein, the term “sidewall”, when utilized in the context of “every point on the sidewall being positioned a distance equal to the radius (i.e. R_C) away from the center point of the great circle”, is intended to mean the average or mean height of the jagged outer surface of the sidewall thereby factoring out any slight fluctuations in the distance from the center point of
15 the great circle caused by the textured or porous outer surface of the sidewall.

The outer face of the annular rim 30 of the cup body 24 defines a segmental plane 40 (shown as a line in the side elevational view of FIG. 2) which intersects the imaginary hemisphere 32. The segmental plane
20 40 is oriented substantially parallel to the great circle 36 and is spaced apart from the great circle 36 by a relatively small distance D . Hence, every point on the outer peripheral edge of the annular rim is spaced apart from the great circle 36 by the distance D . In one exemplary embodiment,

distance D is between 0.5 and 2.0 millimeters. In a more specific embodiment, distance D is approximately 1 millimeter.

As a result, the cup body 24 of the acetabular cup 12 is configured a substantially true hemisphere. Indeed, with the exception of (1) the
5 portion of the cup 12 near its apex 28 which is removed in order to facilitate a threaded aperture 42 which is utilized during implantation of the cup 12, and (2) the portion of the sidewall 26 which would be present if the sidewall 26 was extended the distance D toward the great circle 32 of the imaginary hemisphere 32, the cup body 24 is, in fact, configured as a
10 true hemisphere. As shall be discussed below, such a configuration (i.e. that of a nearly true hemisphere) provides numerous advantages to the acetabular cup 12 relative to heretofore designed cups.

Referring now to FIG. 3, there is shown a cutting tool or reamer 50 associated with the prosthetic hip assembly 10. The reamer 50 is utilized
15 to ream or otherwise cut the acetabulum 16 in order to form a hemispherically-shaped cavity 52 therein (see FIG. 4). The reamer 50 includes a cutting head 54 secured to a shaft 56. The cutting head 54 includes a number of cutting projections 58 which are configured to engage and remove bone material from the patient's acetabulum 16. The
20 outer edges of the cutting projections 58 define the radius of the hemispherically-shaped cutting head 54. In one exemplary embodiment, the cutting projections 58 of the cutting head 54 define a true hemisphere.

In particular, the general profile created by the cutting projections 58 (and hence the cavity created by the reamer 50) is that of a true hemisphere.

Moreover, the radius of the cutting head 54 is preferably slightly smaller than the radius R_C of the acetabular cup 12. In one exemplary embodiment of the present invention, the radius of the cutting head 54 is between one-half (0.5) and one and one-half (1.5) millimeters smaller than the radius R_C of the acetabular cup 12. In a more specific exemplary embodiment of the present invention, the radius of the cutting head 54 is approximately one (1) millimeter smaller than the radius R_C of the acetabular cup 12. For example, if the anatomy of a given patient requires the use of a fifty-six millimeter acetabular cup 12 (i.e. an acetabular cup having an outer diameter of 56 mm), the reamer 50 utilized to ream the patient's acetabulum 16 preferably has a cutting head diameter of fifty-four millimeters (i.e. the outer diameter of the cutting head is 54 mm). Such use of a smaller reamer 50 provides numerous advantages. For example, it has been found that such use of a slightly smaller reamer 50 creates a cavity 52 in the acetabulum 16 which provides preferable amounts of insertion resistance thereby firmly retaining the acetabular cup 12 upon press fit thereof into the cavity 52 without requiring insertion forces large enough to crack or otherwise break the acetabulum.

Hence, as shown in FIG. 4, use of the reamer 50 to ream the acetabulum produces the cavity 52 having a radius R_A . As described

above, the radius of the cutting head 54 of the reamer 50 is preferably slightly smaller than the radius R_C of the acetabular cup 12. Hence, the radius R_A reamed into the cavity 52 of the acetabulum 16 is likewise slightly smaller than the radius R_C of the acetabular cup 12. Such a slight difference in radius size provides for enhanced implantation properties. In particular, as alluded to above, the acetabular cup 12 is configured to be press fit into the reamed cavity 52 of the acetabulum 16 without the use of bone cement. As such, the nearly true hemispheric shape of the acetabular cup 12 provides for constant contact with the reamed hemispherically-shaped cavity 52 of the acetabulum 16 along the entire outer surface of the cup body 24.

Moreover, the presence of a slightly smaller radius R_A of the cavity 52 also causes a need for a slight increase in the insertion force (i.e. the press fit) as the cup 12 is implanted in the direction from the dome 28 to the annular rim 30. This slightly increased resistance enhances the retention of the cup 12 when it is press fit into the acetabulum 16. In addition, since the cavity 52 is reamed, for example, two (2) millimeters smaller in diameter relative to the acetabular cup 12 (i.e. R_A is 2 mm smaller than R_C), an approximately one millimeter difference is created on each "side" of the annular rim 30. Indeed, as shown in FIG. 6, a "graduated" or slightly increasing press fit is created as the acetabular cup 12 is implanted into the acetabulum 16. Specifically, line-to-line contact exists between the cup 12 and the cavity 52 in the area near the dome 28

of the cup 12. Hence, the press fit of the cup 12 into the cavity 52 gradually increases from approximately zero in the areas of such line-to-line contact (i.e. the dome 28) to a press fit that equals a distance P on each "side" of the cup 12 at the annular rim 30. In the exemplary
5 embodiment described in FIG. 6, the distance P is one millimeter (1 mm) thereby creating an overall press fit of two millimeters (2 mm) at the annular rim 30 of the cup 12. This increasing press fit provides for a reliable (i.e. stable) press fit of the acetabular cup 12 into the reamed cavity 52 thereby further enhancing the retention of the cup 12 in the
10 reamed cavity 52.

Moreover, as described above, since both the reamed cavity 52 and the acetabular cup 12 are configured as nearly true hemispheres having similar sizes, the outer surface of the sidewall 26 of the cup 12 contacts the reamed hemispherically-shaped cavity 52 of the acetabulum
15 16 along substantially all of the surface of the cavity 52. Hence, the outer porous surface of the sidewall 26 of the acetabular cup 12 "scratches" or otherwise slightly abrades substantially all of the wall surface of the cavity 52 as the cup 12 is press fit into the cavity 52. This slight abrading facilitates bone ingrowth into the porous outer surface of the acetabular
20 cup 12.

Operation of the Present Invention

In operation, the prosthetic hip assembly 10 of the present invention is utilized in the performance of either a total or partial hip replacement procedure in order to provide an artificial bearing surface for either a natural or artificial head portion of the femur without the use of bone cement. As shown in FIG. 4, the reamer 50 is first utilized to ream or otherwise cut the acetabulum 16 in order to form the hemispherically-shaped cavity 52 therein. In particular, the surgeon rotates the reamer 50 such that the cutting projections 58 of the cutting head 54 engage and remove bone material from the patient's acetabulum 16. As described above, the radius of the cutting head 54 is preferably slightly smaller than the radius R_C of the acetabular cup 12. For example, the reamer 50 utilized by the surgeon generally has a cutting radius which is approximately one (1) millimeter smaller than the radius R_C of the acetabular cup 12 that is to be implanted. For example, if the anatomy of the patient requires the use of a fifty-six millimeter acetabular cup 12 (i.e. an acetabular cup having an outer diameter of 56 mm), the reamer 50 utilized to ream the patient's acetabulum 16 preferably has a cutting head diameter of fifty-four millimeters (i.e. the outer diameter of the cutting head is 54 mm).

Hence, as shown in FIG. 4, once the surgeon has utilized the reamer 50 to ream the acetabulum 16, the hemispherically-shaped cavity 52 (having a radius R_A) is formed. Thereafter, the surgeon implants the

acetabular cup 12 into the reamed acetabulum 16. In particular, the acetabular cup 12 is press fit into the reamed cavity 52 of the acetabulum 16 by the surgeon without the use of bone cement. During such press fitting, the true hemispherical shape of the acetabular cup 12 provides for constant contact with the reamed hemispherically-shaped cavity 52 of the acetabulum 16 along the entire outer surface of the cup body 24. Moreover, the presence of a slightly smaller radius R_A of the cavity 52 also causes a need for a slight increase in the insertion force as the cup 12 is implanted in the direction from the dome 28 to the annular rim 30. This increases the retention of the cup 12 when it is press fit into the acetabulum 16.

Moreover, since the cavity 52 is reamed, for example, two (2) millimeters smaller in diameter relative to the acetabular cup 12 (i.e. R_A is 2 mm smaller than R_C), an approximately one millimeter difference is created on each "side" of the annular rim 30. This slight difference provides for a reliable (i.e. stable) press fit of the acetabular cup 12 into the reamed cavity 52.

In addition, during press fitting of the acetabular cup 12 into the reamed cavity 52, the outer porous surface of the sidewall 26 of the acetabular cup 12 "scratches" or otherwise slightly abrades substantially all of the wall surface of the cavity 52. As described above, this slight abrading facilitates bone ingrowth into the porous outer surface of the acetabular cup 12. Moreover, the similar configuration and size of the

acetabular cup 12 and reamed cavity 52 allows the cup 12 to be fully seated into a position in which the annular rim 30 is substantially flush mounted with the distal surface of the acetabulum 16 (see FIG. 5) without requiring significant amounts of "estimating" by the surgeon during reaming of the bone.

Once the acetabular cup has been press fit into the cavity 52 defined in the acetabulum 16, the bearing insert 14 is installed. In particular, the bearing insert 14 may then be positioned in the insert-receiving cavity 18 (see FIG. 1) defined in the acetabular cup 12. As described above, the keying tabs 20 of the bearing insert 14 are received into the corresponding keying slots 22 defined in the acetabular cup 12 to prevent rotation of the bearing insert 14 relative to the acetabular cup 12. Once installed in such a manner, the bearing insert 14 provides a desirable artificial surface on which the artificial or natural head portion of the femur may bear.

Hence, as described herein, the prosthetic hip assembly 10 of the present invention provides numerous advantages over heretofore designed assemblies. For example, the prosthetic hip assembly 10 of the present invention may be utilized to secure the acetabular cup to the acetabulum without the use of bone cement. Moreover, use of a constant radius, nearly true hemispherically-shaped acetabular cup provides for enhanced performance characteristics such as resistance to loosening and instability since the configuration of the cup distributes loads more

evenly across the entire outer surface of the cup relative to heretofore designed dual-geometry or bubble cups. In addition, the use of a constant radius cup prevents the development of gaps near the flared outer rim surfaces of heretofore designed dual-geometry or bubble cups.

- 5 It is known that the presence of such gaps not only prevents bone ingrowth, but also undesirably facilitates the formation of lysis in the bone positioned near the rim of the cup.

In addition, since both the reamer 50 and the acetabular cup 12 are configured as nearly true hemispheres having similar sizes, the surgeon is
10 not required to estimate the approximate depth as to when the acetabulum has been reamed deeply enough. This is a significant improvement over the use of heretofore designed sub-hemispherical cups in which the surgeon must do such estimating.

Moreover, since both the reamer (and hence the reamed cavity 52)
15 and the acetabular cup 12 are configured as nearly true hemispheres having similar sizes, the outer surface of the sidewall 26 of the cup 12 contacts the reamed hemispherically-shaped cavity 52 of the acetabulum 16 along substantially all of the surface of the cavity 52. As described above, this feature causes the outer porous surface of the sidewall 26 of
20 the acetabular cup 12 to “scratch” or otherwise slightly abrade substantially all of the wall surface of the cavity 52 as the cup 12 is press fit into the cavity 52. Such slight abrading advantageously facilitates bone ingrowth into the porous outer surface of the acetabular cup 12.

Further, the similar configuration and size of the acetabular cup 12 and the reamed cavity 52 also allows the cup 12 to be fully seated into a position in which the annular rim 30 is substantially flush with the distal surface of the acetabulum 16 (see FIG. 5) without requiring significant amounts of "estimating" by the surgeon during reaming of the bone.

Moreover, use of a reamer which is slightly smaller than the acetabular cup provides preferable amounts of resistance thereby firmly retaining the acetabular cup upon press fit thereof into the cavity without requiring insertion forces large enough to crack or otherwise break the acetabulum.

While the invention has been illustrated and described in detail in the drawings and foregoing description, such an illustration and description is to be considered as exemplary and not restrictive in character, it being understood that only the preferred embodiment has been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

There are a plurality of advantages of the present invention arising from the various features of the prosthetic hip assembly and associated method described herein. It will be noted that alternative embodiments of the prosthetic hip assembly and associated method of the present invention may not include all of the features described yet still benefit from at least some of the advantages of such features. Those of ordinary skill in the art may readily devise their own implementations of a prosthetic hip

assembly and associated method that incorporate one or more of the features of the present invention and fall within the spirit and scope of the present invention as defined by the appended claims.

What is claimed is:

1. A method of securing an acetabular cup to an acetabulum so as to provide a bearing surface for a head portion of a femur, comprising the steps of:

5 reaming a hemispherically-shaped cavity into said acetabulum with a reamer, wherein said reamer includes a hemispherically-shaped cutting head; and

press fitting said acetabular cup into said cavity reamed into said acetabulum, wherein (i) said acetabular cup includes a cup body having a substantially constant radius sidewall which extends outwardly from an
10 apex to an annular rim, (ii) said sidewall defines an imaginary hemisphere with an outer face of said annular rim defining a segmental plane which intersects said imaginary hemisphere, (iii) said segmental plane is parallel to a great circle of said imaginary hemisphere, (iv) said segmental plane is
15 separated from said great circle of said imaginary hemisphere by a distance D, and (v) $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

2. The method of claim 1, wherein D is approximately one (1) millimeter.

3. The method of claim 1, wherein:

said hemispherically-shaped cutting head of said reamer has a first radius,

said reaming step includes the step of reaming said acetabulum

5 such that said cavity possesses said first radius,

said imaginary hemisphere defined by said sidewall of said cup body has a second radius, and

said second radius is greater than said first radius.

10 4. The method of claim 3, wherein said second radius is between one-half ($\frac{1}{2}$) and one and one-half ($1\frac{1}{2}$) millimeters greater than said first radius.

15 5. The method of claim 3, wherein said second radius is approximately two (2) millimeters greater than said first radius.

6. The method of claim 1, further comprising the step of positioning a bearing insert into said acetabular cup, wherein said bearing insert is configured to accept therein said head portion of said femur when
20 said bearing insert is positioned in said acetabular cup.

7. The method of claim 1, wherein said press fitting step includes the step of advancing said acetabular cup into said cavity reamed into said acetabulum until said outer surface of said annular rim is substantially flush with a distal surface of said acetabulum.

5

8. A prosthetic hip assembly for replacing a natural bearing surface of an acetabulum with an artificial bearing surface adapted to cooperate with a head portion of a femur, said prosthetic hip assembly comprising:

10 a hemispherically-shaped reamer adapted to ream a hemispherically-shaped cavity into said acetabulum, said reamer including a hemispherically-shaped cutting head; and

an acetabular cup adapted to be press fit into said cavity reamed into said acetabulum, wherein (i) said acetabular cup includes a cup body
15 having a substantially constant radius sidewall which extends outwardly from an apex to an annular rim, (ii) said sidewall defines an imaginary hemisphere with an outer face of said annular rim defining a segmental plane which intersects said imaginary hemisphere, (iii) said segmental plane is parallel to a great circle of said imaginary hemisphere, (iv) said
20 segmental plane is separated from said great circle of said imaginary hemisphere by a distance D , and (v) $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

9. The assembly of claim 8, wherein D is approximately one (1) millimeter.

10. The assembly of claim 8, wherein:

5 said hemispherically-shaped cutting head of said reamer has a first radius,

 said imaginary hemisphere defined by said sidewall of said cup body has a second radius, and

 said second radius is greater than said first radius.

10

11. The assembly of claim 10, wherein said second radius is between one-half ($\frac{1}{2}$) and one and one-half ($1\frac{1}{2}$) millimeters greater than said first radius.

15

12. The assembly of claim 10, wherein said second radius is approximately two (2) millimeters greater than said first radius.

13. The assembly of claim 8, further comprising a bearing insert,
wherein:

said bearing insert is adapted to be positioned into said acetabular
cup, and

5 said bearing insert is configured to accept therein said head portion
of said femur when said bearing insert is positioned in said acetabular
cup.

14. The assembly of claim 8, wherein said outer surface of said
10 annular rim of said acetabular cup is substantially flush with a distal
surface of said acetabulum when said acetabular cup is press fit into said
cavity reamed into said acetabulum.

15. A method of securing an acetabular cup to an acetabulum, said acetabular cup having a bearing surface adapted to receive a head portion of a femur, comprising the steps of:

reaming a hemispherically-shaped cavity having a first radius into
5 said acetabulum with a reamer, wherein said reamer includes a hemispherically-shaped cutting head which possesses said first radius; and

press fitting said acetabular cup into said cavity reamed into said acetabulum, wherein (i) said acetabular cup includes a cup body having a
10 substantially constant radius sidewall which extends outwardly from an apex to an annular rim, (ii) said sidewall defines an imaginary hemisphere having a second radius, (iii) said second radius is greater than said first radius, (iv) an outer face of said annular rim of said cup body defines a segmental plane which intersects said imaginary hemisphere, (v) said
15 segmental plane is parallel to a great circle of said imaginary hemisphere, (vi) said segmental plane is separated from said great circle of said imaginary hemisphere by a distance D, (vii) $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

16. The method of claim 15, wherein D is approximately one (1) millimeter.

17. The method of claim 15, wherein said second radius is
5 between one-half ($\frac{1}{2}$) and one and one-half ($1\frac{1}{2}$) millimeters greater than said first radius.

18. The method of claim 15, wherein said second radius is
10 approximately two (2) millimeters greater than said first radius.

19. The method of claim 15, further comprising the step of
positioning a bearing insert into said acetabular cup, wherein said bearing
insert is configured to accept therein said head portion of said femur when
said bearing insert is positioned in said acetabular cup.

15 20. The method of claim 15, wherein said press fitting step includes the step of advancing said acetabular cup into said cavity reamed into said acetabulum until said outer surface of said annular rim is substantially flush with a distal surface of said acetabulum.

21. A method of securing an acetabular cup to an acetabulum so as to provide a bearing surface for a head portion of a femur, comprising the steps of:

reaming a hemispherically-shaped cavity into said acetabulum with
5 a reamer; and

press fitting said acetabular cup into said cavity reamed into said acetabulum, wherein (i) said acetabular cup includes a cup body having (a) an outer rim, and (b) a sidewall which defines an imaginary hemisphere having a great circle, (ii) all points located on said sidewall are
10 separated from a center point of said great circle by a substantially equal distance R, (iii) all points located on a peripheral edge of said outer rim are separated from said great circle of said imaginary hemisphere by a distance D, and (iv) $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

15 22. The method of claim 21, wherein D is approximately one (1.0) millimeter.

23. The method of claim 21, wherein:

said reamer includes a hemispherically-shaped cutting head,

said hemispherically-shaped cutting head of said reamer has a first radius,

5 said reaming step includes the step of reaming said acetabulum
such that said cavity possesses said first radius,

 said imaginary hemisphere defined by said sidewall of said cup
body has a second radius which is equal to said distance R, and
 said second radius is greater than said first radius.

10

24. The method of claim 23, wherein said second radius is
between one-half ($\frac{1}{2}$) and one and one-half ($1\frac{1}{2}$) millimeters greater than
said first radius.

15

25. The method of claim 23, wherein said second radius is
approximately two (2) millimeters greater than said first radius.

26. A prosthetic hip assembly for replacing a natural bearing surface of an acetabulum with an artificial bearing surface adapted to cooperate with a head portion of a femur, said prosthetic hip assembly comprising:

5 a hemispherically-shaped reamer adapted to ream a hemispherically-shaped cavity into said acetabulum; and

 an acetabular cup adapted to be press fit into said cavity reamed into said acetabulum, wherein (i) said acetabular cup includes a cup body having (a) an outer rim, and (b) a sidewall which defines an imaginary
10 hemisphere having a great circle, (ii) all points located on said sidewall are separated from a center point of said great circle by a substantially equal distance R, (iii) all points located on a peripheral edge of said outer rim are separated from said great circle of said imaginary hemisphere by a distance D, and (iv) $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$.

15

27. The assembly of claim 26, wherein D is approximately one (1) millimeter.

28. The assembly of claim 26, wherein:

said reamer includes a hemispherically-shaped cutting head,

said hemispherically-shaped cutting head of said reamer has a first radius,

5 said imaginary hemisphere defined by said sidewall of said cup body has a second radius which is equal to said distance R, and
said second radius is greater than said first radius.

29. The assembly of claim 28, wherein said second radius is

10 between one-half ($\frac{1}{2}$) and one and one-half ($1\frac{1}{2}$) millimeters greater than said first radius.

30. The assembly of claim 28, wherein said second radius is

approximately two (2) millimeters greater than said first radius.

Abstract of the Invention

A method of securing an acetabular cup to an acetabulum so as to provide a bearing surface for a head portion of a femur includes the step of reaming a hemispherically-shaped cavity having a first radius into the acetabulum with a reamer. The reamer includes a hemispherically-shaped cutting head which possesses the first radius. The method also includes the step of press fitting the acetabular cup into the cavity reamed into the acetabulum. The acetabular cup includes a cup body having a substantially constant radius sidewall which extends outwardly from an apex to an annular rim. The sidewall defines an imaginary hemisphere having a second radius. The second radius is greater than the first radius. An outer face of the annular rim of the cup body defines a segmental plane which intersects the imaginary hemisphere. The segmental plane is parallel to a great circle of the imaginary hemisphere. The segmental plane is separated from the great circle of the imaginary hemisphere by a distance D in which $0.5 \text{ millimeters} \leq D \leq 2.0 \text{ millimeters}$. A prosthetic hip assembly for replacing a natural bearing surface of an acetabulum with an artificial bearing surface for a head portion of a femur is also disclosed.

11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 10

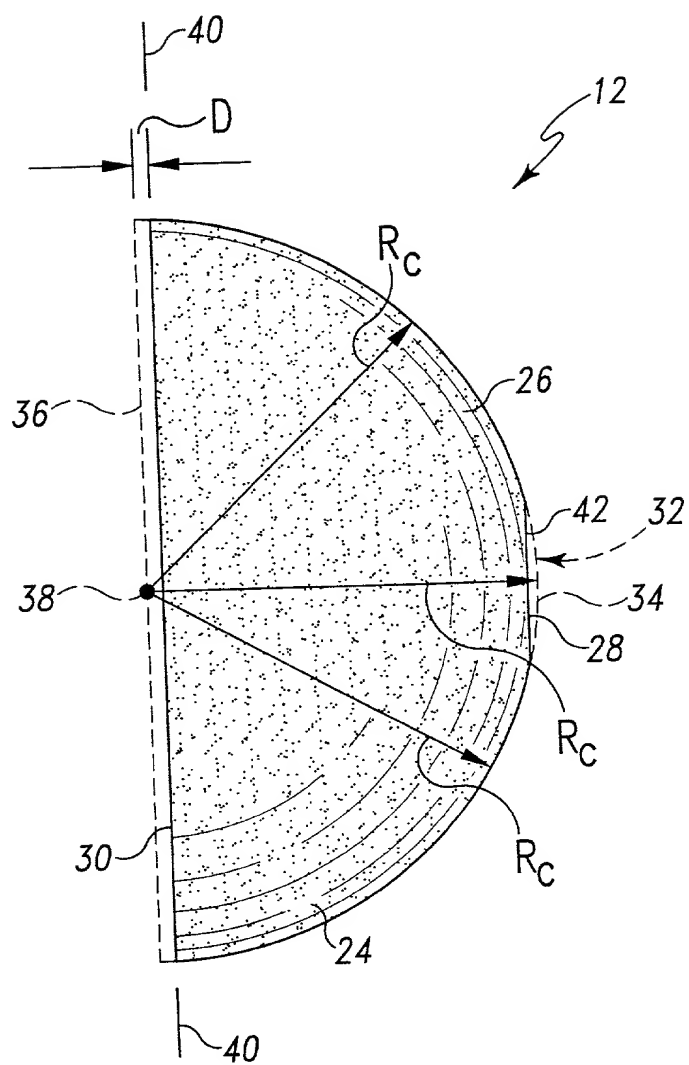


Fig. 2

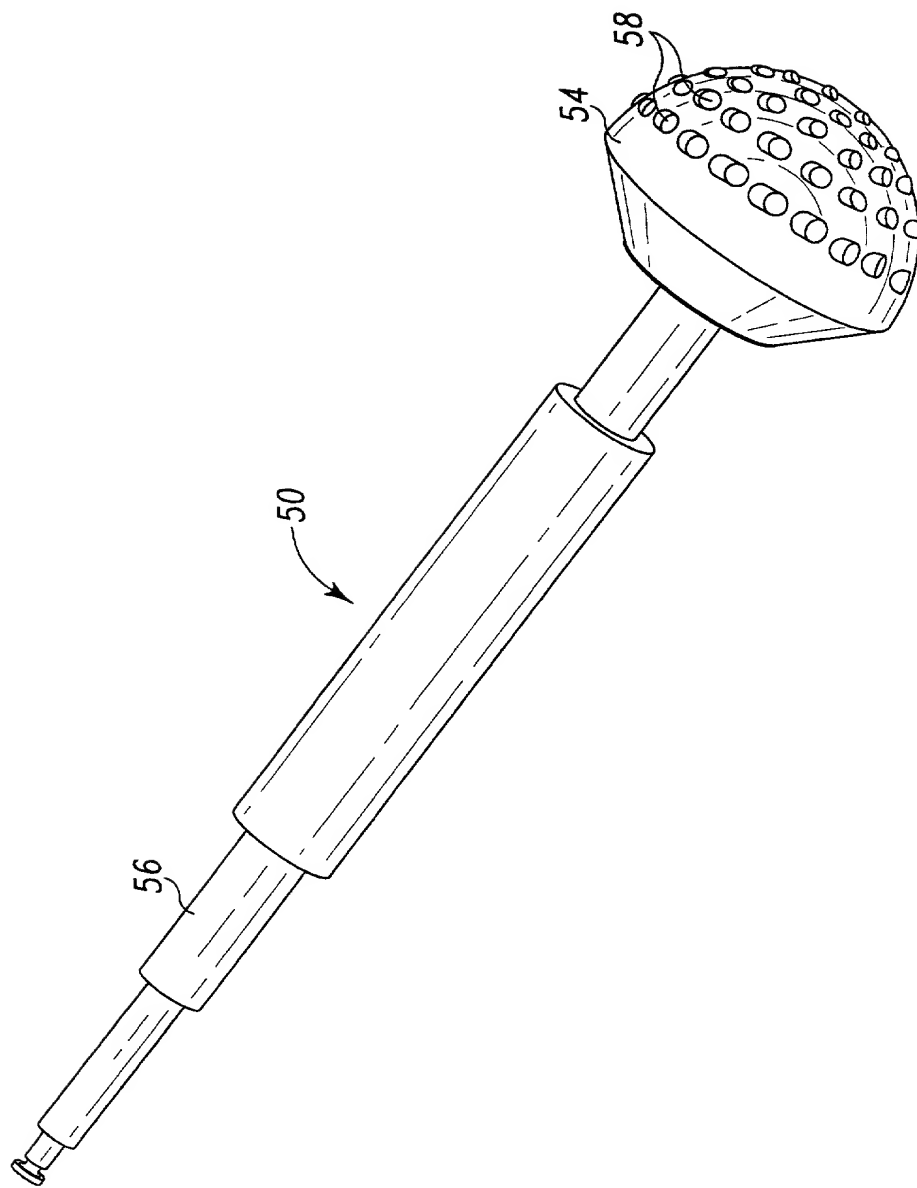


Fig. 3

Fig. 4

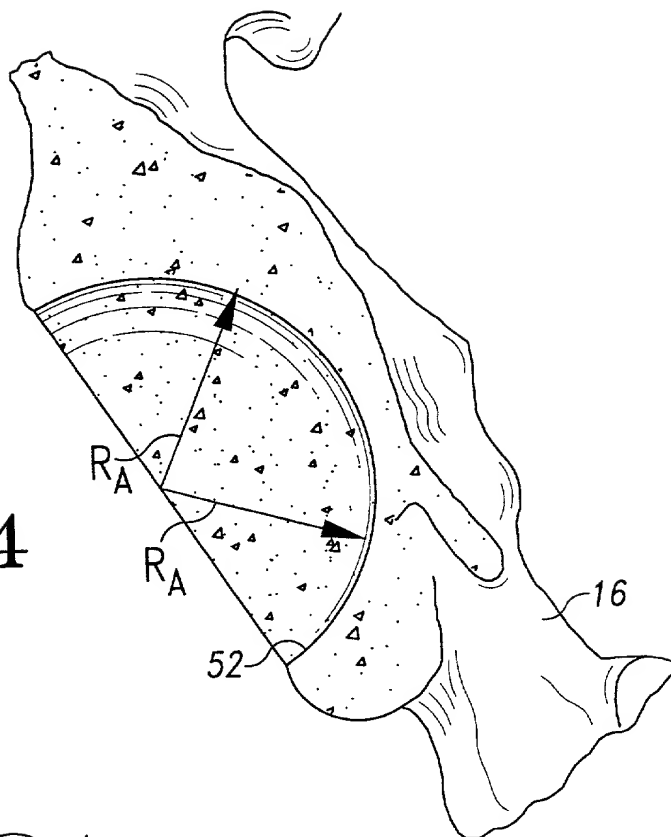


Fig. 5

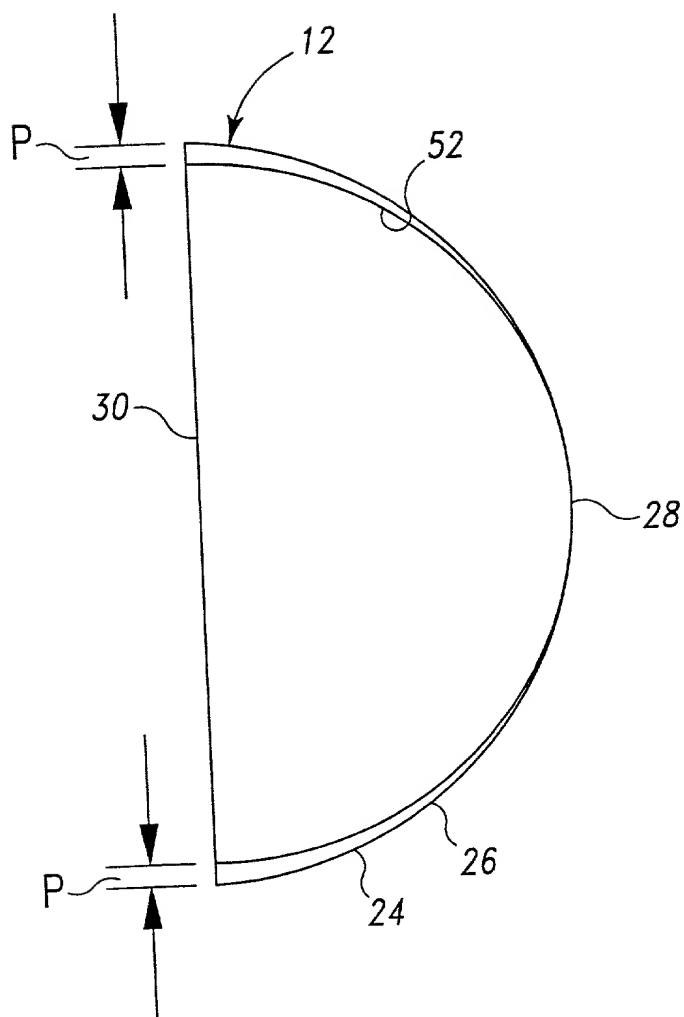


Fig. 6

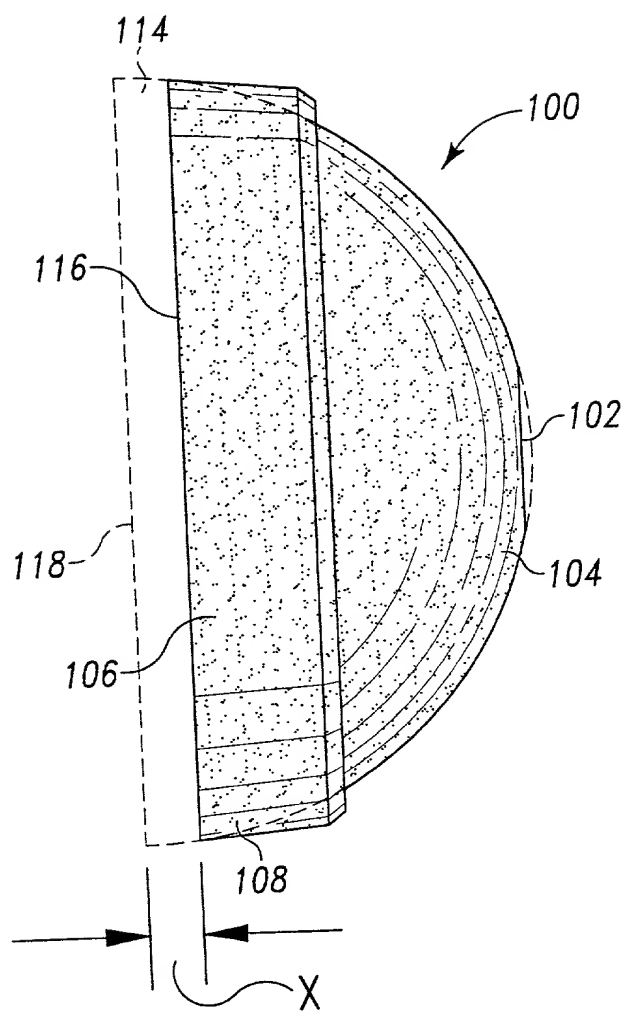


Fig. 7
(PRIOR ART)

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought in the application entitled

ACETABULAR CUP AND REAMER ASSEMBLY AND ASSOCIATED METHOD FOR SECURING THE CUP TO AN ACETABULUM

the specification of which

(check one)

X

is attached hereto.

was filed on _____ as

United States Application Serial No. _____ or

PCT International Application No. _____

and was amended on _____

(if applicable)

I hereby declare that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate on which priority is claimed (as listed below) and I have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ Yes	_____ No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	_____ Yes	_____ No

I hereby claim benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

Application Number

Filing Date

Application Number

Filing Date

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)(Patented, Pending, Abandoned)

(Application Serial No.)

(Filing Date)

(Status)(Patented, Pending, Abandoned)

And I hereby appoint Paul J. Maginot, Registration No. 34,984, Bradford G. Addison, Registration No. 41,486, Harold C. Moore, Registration No. 37,892, Shawn D. Bauer, Registration No. 41,603, and Bruce J. Bowman, Registration No. 35,458, as attorneys of record with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Please direct all communications regarding the application to:

Paul J. Maginot, Esq.
Maginot, Addison & Moore
111 Monument Circle, Suite 3000
Bank One Center/Tower
Indianapolis, Indiana 46204-5130
Telephone (317) 638-2922
Facsimile (317) 638-2139

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of Sole or first inventor Mark B. Lester

Inventor's signature

Date:

Residence 2417 S. Woodland Circle, Warsaw, Indiana 46580

Citizenship United States of America

Post Office Address Same as above

Full name of second inventor, if any Michael C. Jones

Inventor's signature

Date:

Residence 205 N. Short Street, North Webster, Indiana 46555

Citizenship United States of America

Post Office Address P.O. Box 620, North Webster, Indiana 46555